
SPECIFICATIONS

Designer	Finot / Cong	
L.O.A.	32' 3"	9.85 m
Hull length	31' 3"	9.54 m
L.W.L.	28' 8"	8.80 m
Max. Beam	10' 6"	3.23 m
Displacement	7,716 lbs.	3,500 kg
Draft - std.	4' 8"	1.45 m
Ballast - std.	2,425 lbs.	1,100 kg
Draft - opt.	2' 7" - 7' 1"	0.8 - 2.15 m
Ballast - opt.	3,085 lbs.*	1,400 kg
Fuel	18 gal.	70 L
Water	52 gal.	200 L
Auxiliary	18 hp	

*2,425 lbs fixed + 660 lbs in retractable keel

RIG DIMENSIONS
CLASSIC MAST

I	40.35 ft.	12.30 m
J	11.35 ft.	3.46 m
P	36.61 ft.	11.16 m
E	13.19 ft.	4.02 m
Mast Ht. over DWL	46' 7"	14.20 m

Sail Area


100% Foretriangle	500 sq.ft.	46.4 sq.m.
Genoa size	116%	
Std. sail area	539 sq.ft.	50.1 sq.m.

ROLLER FURLING MAST

I	40.35 ft.	12.30 m
J	11.35 ft.	3.46 m
P	36.29 ft.	11.06 m
E	13.19 ft.	4.02 m
Mast Ht. over DWL	46' 7"	14.20 m

Sail Area

100% Foretriangle	468 sq.ft.	43.5 sq.m.
Genoa size	116%	
Std. sail area	481 sq.ft.	44.7 sq.m.

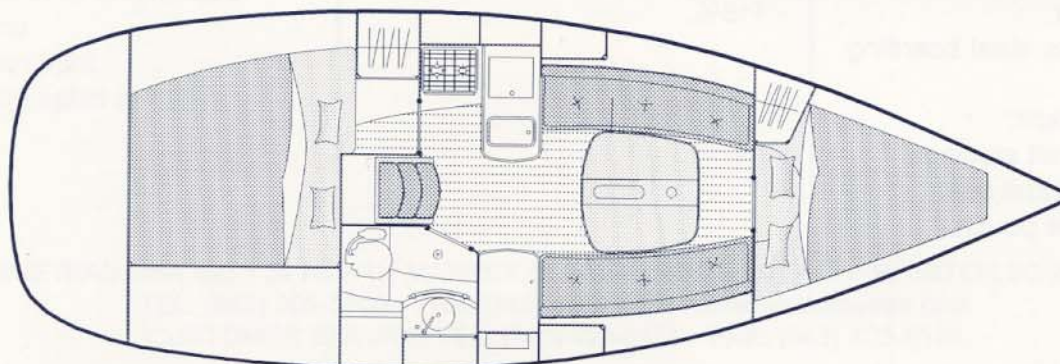

SPECIFICATIONS

Includes all standard equipment listed below, F.O.B. Marion, SC

CONSTRUCTION

HULL: Laminated G.R.P hull with internal grid, fiberglass hull liner, reinforced with unidirectional rovings.

DECK: Balsa sandwich for stiffness, plus thermal and acoustic insulation. Deck liner for additional insulation and easy maintenance.

INTERIOR FINISH: Cherry stained finish.

STRUCTURAL BULKHEADS bonded 360 degrees to hull and deck liners for maximum strength.

ON DECK

Aluminum stemhead fitting with roller and fairlead.

Self-bailing anchor well.

(4) anodized aluminum mooring cleats.

Aluminum toe rail.

Bow pulpit with two-color navigation light.

Stainless steel stanchions with flush bases.

Double lifelines.

Lifeline gates.

Stainless steel stern pulpit with horseshoe buoy holder.

Main sheet and genoa tracks.

Removable access step to transom.

Teak-slatted swim platform with transom fender.

Folding stainless steel boarding ladder.

Self-bailing cockpit.

Sail locker/ liferaft stowage.

Teak-slatted cockpit seats.

(1) winch handle pouch.

Wheel steering.

DECK FITTINGS AND RIGGING

Stainless steel standing rigging.

Anodized aluminum mast stepped on deck.

(1) set of aft-swept spreaders.

Anodized aluminum boom.

Mast step fitting with articulated blocks.

(2) Genoa sheet tracks on side-decks with adjustable genoa cars.

(2) genoa sheet turning blocks.

(2) Lewmar 30 CSTO genoa sheet winches.

(1) Lewmar 16 CSTO maneuvering winch.

(1) Spinlock double stoppers.

Mainsheet traveller on coachroof.

Running Rigging

Genoa halyard.

Mainsail halyard.

Mainsheet.

Rigid vang.

(2) Continuous reefing lines led to the cockpit.

Mainsail outhaul.

Genoa sheets.

Genoa furling line led to the cockpit.

SAILS

Standard semi full batten mainsail with lazy jacks.

Furling genoa with UV protection - 116%.

INTERIOR LAYOUT

Companionway

Headroom 6'1"

(2) Wooden handrails.

Acrylic sliding companionway hatch.

Curved companionway steps in GRP with non-skid treads.

Varnished wood hatch boards.

Salon

Headroom : 6'0"

2 Settees (6'3" long)

Salon table.

Lockers along the hull with doors.

Wood side paneling.

Wooden grabrails.

Coachroof lined with wood slats.

(1) Lewmar (20 3/4" x 15 5/8") opening deck. Hatch on coachroof with blind. Water-resistant flooring.

(2) Fixed hull portholes : (7 5/8" x 25 5/8").

(1) Transom opening portlight.

Stowage lockers under settees.

Nav Station

Chart table with lockers.

Panel for navigation instruments.

12-volt electric panel - 9 circuits.

(5) 110-volt outlets.

16 gal ice box with 12v refrigeration unit under chart table.

Galley to port

Headroom 6'0".
Rectangular stainless steel sink.
Laminated work-top.
Mixer tap, pressurized hot and cold water.
6 gal water heater 110v.
Cutlery drawer.
Stowage lockers.
(2) Burner stove/oven, with 1-10lb tank, LPG gas system.
Trash can.
(1) Lewmar (13 3/4" x 7 5/8") opening porthole with curtain
(1) overhead light.

Head

USCG approved marine toilet with holding tank, 13 gal.
(1) Lewmar (13 3/4" x 7 5/8") opening portlight.
GRP washbasin with mixer tap, pressurized hot and cold water.
Bilge pump.
Mirror.
(1) Halogen overhead light.

Aft cabin

(1) Double berth (6'4" x 6'6").
High density mattress.
(1) Fixed portlight in the transom.
(2) Lewmar (13 3/4" x 7 5/8") opening portlights with curtains.
Shelf on transom.
Locker along the hull.
Hanging locker.
Stowage under berth.
Access hatch to engine and shaft gland.
(1) Halogen light.
(2) Reading lights in cabin.

Forward cabin

Headroom 5'8"
1 double berth (6'6" x 5'0").
Hanging locker.
Wood paneling and padding against the hull.
Stowage under berth.
(1) Halogen light.
Door between salon and cabin.

ENGINE

Diesel engine 18hp.
18 gal fuel tank.
Fuel filter.
Engine mounts incorporated in hull liner.
Engine control lever in cockpit.
Shaft protected by fiberglass molded skeg.
2-blade fixed propeller.
Engine compartment with eggshell foam insulation.

ELECTRICAL SYSTEM

Rigging grounding system
12-volt electric circuit.
12-volt electric panel - 9 circuits.
2 x 75 Amp batteries with battery switches.
20 amp battery charger.
Electric refrigeration unit.
(5) 110 volt outlets.
Electric bilge pump.
Shore power inlet 30A on transom.

MISCELLANEOUS

Pedestal steering w/engine controls, compass, instrument pod, guard, and folding table.
Hand-operated bilge pump.
2 winch handles.
Owner's manual.
Individual keys for water and diesel fuel filler caps.

OPTIONS

- In mast furling mainsail
- Double rudder retractable keel
- Cradle

CRUISING PACKAGE

*Additional standard equipment.
Details listed on back.*

- Raytheon ST40 Bidata
- Standard Horizon Eclipse + VHF with Antenna
- Cold water cockpit shower
- 110 volt shorepower cord
- Stereo radio with salon speakers
- Stern rail seats

BENETEAU USA INC • 24 NORTH MARKET STREET • SUITE 201 • CHARLESTON, SC 29401
TEL: (843) 805-5000 • FAX: (843) 805-5010 • www.beneteauusa.com
CUSTOMER SERVICE TEL: (843) 423-6459 • FAX: (843) 423-5516

The manufacturer reserves the right to alter equipment and specifications without notice. All specifications are approximations and are not contractual in nature.

SAIL-AWAY 2001

CRUISING PACKAGE

Beneteau *additional* standard equipment means
more value for you!

**Raytheon ST40 Bidata**

If you are looking for powerful, feature-packed instruments in a compact package, ST40 is the answer. Elegant and simple to operate, thanks to the use of just three control buttons, ST40 has extra large digits and razor sharp LCD displays for outstanding visibility in all lighting conditions.

**Standard Horizon Eclipse
+ VHF with Antenna**

25 watt output, all U.S., Canadian and international channels, plus 10 weather channels. Features NOAA Weather Alert, programmable scan/priority scan and microphone with channel selector.

**Stemrail Seats**

Custom made to fit the stem rail of your new Beneteau. Seats are made of all weather material and offer the convenience of a drink holder. The seats are removable.

Stereo

AM/FM electronic tuner, cassette player with 2 salon speakers.

110 Volt Shore Power Cord**Cold Cockpit Shower****SAVE \$2,300 RETAIL VALUE**

Beneteau USA • 24 N. Market St., Suite 201 • Charleston, S.C. • 29401 • (843) 805-5000 • Fax: (843) 805-5010
Customer Service (843) 423-6459 • Fax: (843) 423-5516 • www.beneteauusa.com

*Note: Items factory installed. The manufacturer reserves the right to alter equipment and specifications without notice.
All specifications are approximations and are not contractual in nature.*